



# Walk-in Fume Hood

Product Brochure

# Walk-in Fume Hood

Walk-in fume cupboard is applicable for handling tall apparatus and large hazardous containers. The sash can be horizontal/vertical sliding for ease of access.



1. Body
2. Service fixture
3. Water faucet
4. Sash
5. Electrical socket

## Features

- Industrial-grade electro-galvanized steel construction with epoxy powder finish
- High corrosion resistance
- 3-part vertical/horizontal sliding sash for ease of access
- Customisable components such as service fixtures and water faucets
- Customisable length with the minimum length of 1800mm (6')
- Available in two materials; electro-galvanized steel and polypropylene

## Customisations



Gas outlet/valve type and location



External hood colour variations



Water faucet type and location



Hazard symbol stickers




Digital airflow display/airflow regulator



Emergency stop button

## Product Details

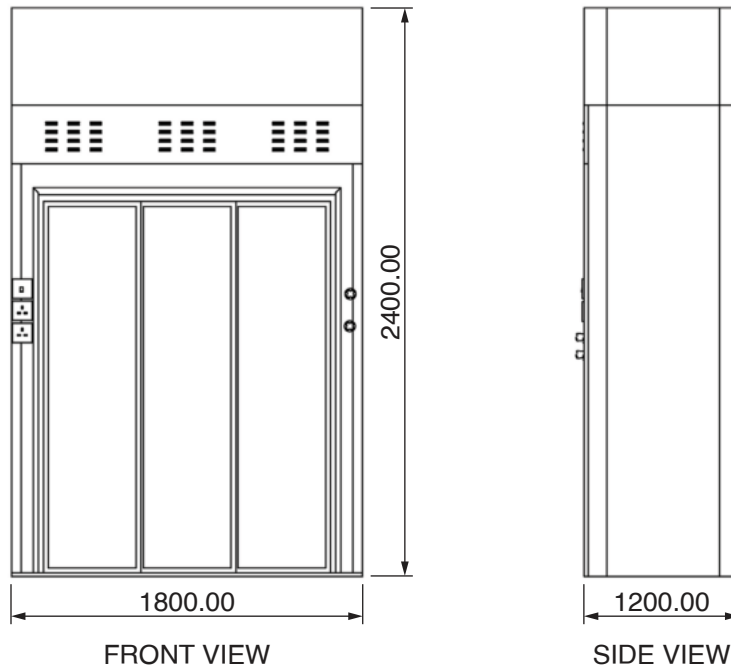

Model	<b>WIFH-6-MS</b>
External Dimensions (mm)	1800(L) x 1200(W) x 2400(H) *custom length available upon request
Internal Dimensions (mm)	1550(L) x 1030(W) x 2050(H)
Material	1.2mm(Thk) Electro-galvanized steel sheet with epoxy powder coating finish
Sash	5mm(Thk) Clear glass / Polycarbonate / Acrylic / Tempered glass
Standard Features	-1 Unit cold water inlet -1 Unit inert gas inlet -1 Unit cup sink on side wall -3 Units BS Electrical socket on side panel
Interior	Fiber-reinforced polyester (FRP)
Base	1.2mm(Thk) Electro-galvanized steel sheet with epoxy powder coating finish
Power Consumption	10W (Lighting)
Volumetric Flow Rate	6ft: 1200 - 1500 cfm
Face Velocity	0.5 m/s at > 300(H)



Website:



Contact details:



Copyright © 2024 Machlab Scientific Sdn. Bhd. All Rights Reserved.  
Machlab Scientific Sdn. Bhd. has made every reasonable effort to present the contents of this catalogue accurately, but reserves the right to make changes to the information, product specifications and product range in this catalogue without prior notice.